



ECO-FRIENDLY LUBRICANTS WITH

THE POWER TO PROTECT

YOUR MACHINERY, AND THE ENVIRONMENT

BIO-SYNXTREME HF SERIES HYDRAULIC FLUIDS

SYNXTREME AC SERIES COMPRESSOR FLUIDS

SYNCOOL & SYNCOOL FG COMPRESSOR FLUIDS

PGO SERIES GEAR OILS

BIO-SYNXTREME EGO-150

ZF SERIES HYDRAULIC OILS

MARINE SAFE SERIES HYDRAULIC OILS

BIO-BASED SERIES HYDRAULIC OILS

UTF-BIOBASED/GREEN TRACTOR FLUID

BIODEGRADABLE PENETRATING OIL

BIOBASED EP-2 GREASE



Lubriplate
Lubricants

Newark, NJ 07105 / Toledo, OH 43605 / 800-733-4755
www.lubriplate.com / LubeXpert@lubriplate.com



INCLUDED AT NO ADDITIONAL CHARGE



Complimentary Extra Services Package

COLOR CODED LUBE CHARTS & EQUIPMENT TAGS
EQUIPMENT SURVEYS / TECH SUPPORT / TRAINING
LUBRICATION SOFTWARE / FOLLOW-UP OIL ANALYSIS

Lubriplate® Environmentally Responsible Lubricants



Lubriplate's environmentally responsible lubricants have been formulated to help reduce their impact on our environment without sacrificing lubricant performance. Their use can also help our customers comply with the ever increasing environmental regulations for equipment operating in environmentally sensitive areas. This chart lists some of the industry's standards and terms used for environmentally responsible lubricants.

Terminology	Test Method	Requirements / Results
Ultimate Biodegradation (Pw1)	ASTM D-5864	Min 60% converted to CO ₂ in 28 days or less
Readily Biodegradable (Pw1)	OECD 301B	Min 60% converted to CO ₂ in 28 days or less
Inherently Biodegradable (Pw2) (Pw3) (Pw4)	ASTM D-5864 OECD 301B	Min. 60% (Pw2), 40% (Pw3), 20-39% (Pw4) converted to CO ₂ in 84 days
Non/Low Acute Toxicity LC50	US EPA LC50	Pass

ECO-Responsible, Synthetic Fluids / Oils



VGP COMPLIANCE STATEMENT

LUBRIPLATE BIO-SYNXTREME HF Series Hydraulic Fluids are Environmentally Acceptable Lubricants (EALs) according to the definitions and requirements of the US EPA 2013 Vessel General Permit, as described in VGP Section 2.2.9

BIO-SYNXTREME HF Series: Polyalkylene Glycol (PAG)-Based, Biodegradable (Pw1), Synthetic Hydraulic Fluids.

These high performance hydraulic fluids are designed for demanding industrial and marine (VGP) applications requiring environmental sensitivity, fire resistance, and excellent anti-wear properties over wide temperature ranges. They are Polyalkylene Glycol (PAG) based fluids, that are anhydrous (water-free). They do not break down to form sludge and they do not hydrolyze in the presence of water. They do not cause a sheen or discoloration on the surface of the water or adjoining shorelines. Rated "Practically Non-Toxic" to fish and other aquatic wildlife according to the U.S. Fish and Wildlife Service hazard classification. They meet U.S. EPA Vessel General Permit (VGP) Requirements. Not compatible with hydrocarbon-based hydraulic fluids. As with any fluid conversion, recognized industry procedures including system cleanup and flushing should be followed. (**LUBRIPLATE HYDROFLUSH Recommended**).

SYNXTREME AC Series: Polyolester (POE)-Based, 100% Synthetic Air Compressor Fluids.

These state-of-the-art fluids are designed for maximum performance in rotary screw and vane type air compressors. Special advanced POE base esters combined with a multi-charged additive system produce unmatched oxidative stability, enhanced hydrolytic stability and excellent wear and corrosion protection. Potential for fluid drain intervals of +10,000 hours.

SYNCOOL & SYNCOOL FG: Biodegradable, Polyglycolester (PGE)-Based Compressor Fluids.

These high-performance, biodegradable, polyglycol/ester (PGE)-based, synthetic air compressor fluids were developed to meet the needs of most rotary screw and rotary vane air compressors where high operating temperatures are present and environmental issues are a concern. They are readily biodegradable (Meets OECD criteria) >70% biodegradation (Pw1). Excellent thermal and oxidation stability helps eliminate harmful deposits and extend drain intervals. **SYNCOOL FG is NSF H1 Registered and NSF/ISO 21469 Certified Food Machinery Grade.**

PGO Series: ECO-Responsible, Inherently Biodegradable, Polyalkylene Glycol (PAG)-Based, Synthetic Gear Oils.

These 100% polyalkylene glycol (PAG) fluids are designed for gearboxes, bearings and chains operating in the most demanding conditions. They provide outstanding thermal stability, excellent extreme pressure and anti-wear performance and protection against micropitting. They exceed 13 stages of the FZG test. Lubriplate PGO Fluids are free of zinc and other additives that may be undesirable in environmentally sensitive areas. They offer long service life and work well over extended fluid change intervals which conserves resources. Inherently biodegradable (ASTM D-5864/OECD 301B).

BIO-SYNXTREME EGO-150: Environmentally Responsible, Ultimately Biodegradable (Pw1), Synthetic, Gear Oil.

This ultimately biodegradable, synthetic, gear oil is designed to be used in environmentally sensitive areas where demanding operating conditions are expected. It is recommended for a wide variety of gear box configurations including; helical, bevel helical and planetary gear reducers. It delivers outstanding extreme pressure and anti-wear performance and provides good thermal stability.

LUBRIPLATE PRODUCT	*PRODUCT PART NO.	ISO GRADE	AGMA NO.	SAE GEAR OIL NO.	SAE NO.	VISCOSITY cSt @40°C / 100°C	VISCOSITY INDEX	FLASH POINT	FIRE POINT	POUR POINT
BIO-SYNXTREME HF-32	L1020	32	-	-	10	35.4 / 8	194	520°F / 271°C	579°F / 304°C	-74°F / -59°C
BIO-SYNXTREME HF-46	L1021-	46	1	75W	20	46 / 9.8	200	594°F / 312°C	600°F / 316°C	-60°F / -51°C
BIO-SYNXTREME HF-68	L1022-	68	2	80W	20	68 / 13.7	209	550°F / 288°C	612°F / 322°C	-60°F / -51°C
*BIO-SYNXTREME HF Series Fluids are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
SYNXTREME AC 32	L0939-	32	-	-	10	32 / 6	125	525°F / 274°C	-	-51°F / -46°C
SYNXTREME AC 46	L0940-	46	-	-	20	46 / 7	117	527°F / 275°C	-	-40°F / -40°C
SYNXTREME AC 68	L0941-	68	-	-	20	66 / 9	103	530°F / 277°C	-	-20°F / -29°C
*SynXtreme AC Series Fluids are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
SYNCOOL	L0964-	32/46	-	-	10	41 / 8	172	530°F / 277°C	595°F / 313°C	-40°F / -40°C
SYNCOOL FG	L0963-	46	-	-	20	41 / 10	178	530°F / 277°C	595°F / 313°C	-45°F / -43°C
*SYNCOOL & SYNCOOL FG Fluids are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
PGO-150	L0845-	150	4	90	40	150 / 25	232	>536°F / >280°C	-	-53°F / -47°C
PGO-220	L0838-	220	5	90	50	227 / 42	242	>536°F / >280°C	-	-44°F / -42°C
PGO-320	L0840-	320	6	140	60	334 / 59	247	>536°F / >280°C	-	-31°F / -35°C
PGO-460	L0839-	460	7	140	-	477 / 83	262	>536°F / >280°C	-	-33°F / -36°C
PGO-680	L0846-	680	8	250	-	725 / 122	272	>536°F / >280°C	-	-27°F / -33°C
*PGO Series Fluids are available in 1 Gallon Jugs (Package Part No. Suffix -057), 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
BIO-SYNXTREME EGO-150	L1027-	150	4	90	-	162 / 27	207	>410°F / >210°C	-	7°F / -14°C
*BIO-SYNXTREME EGO-150 is available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										

ECO-Responsible, Petroleum/Mineral Oil-Based Hydraulic Oils

ZF Series Hydraulic Fluids: Heavy-Duty, Zinc-Free, Extended Life, Hydraulic Fluids.

These heavy-duty fluids are designed to perform in the most demanding hydraulic applications. They can withstand elevated temperatures and high pressures over extended periods. They provide long service life and extended fluid change intervals. They meet the service requirements of Vickers (Eaton) M-2950-S, I-286-S, General Motors LS-2, Bosch Rexroth RE 90 220, Denison HF-0, HF-1, HF-2 and Cincinnati Milacron P-68, P-69 and P-70. Free of zinc or silicone compounds.

Marine-Safe Hydraulic Oils: Non-Toxic to Aquatic Life (LC50).

Formulated with a "zinc-free" anti-wear additive system, these eco-friendly oils meet or exceed the performance requirements of conventional hydraulic oils while providing an additional level of environmental safety. Non-toxic to aquatic life, they exceed U.S. EPA LC50 and U.S. Fish and Wildlife requirements. They meet the service requirements of Vickers, Racine, Denison HF-0, HF-2 and Cincinnati Milacron P-68, P-69 and P-70.

LUBRIPLATE PRODUCT	*PRODUCT PART NO.	ISO GRADE	AGMA NO.	SAE GEAR OIL NO.	SAE NO.	VISCOSITY cSt @40°C / 100°C	VISCOSITY INDEX	FLASH POINT	FIRE POINT	POUR POINT
ZF 32	L0948-	32	-	-	10	35 / 5	129	440°F / 227°C	480°F / 249°C	-40°F / -40°C
ZF 46	L0949-	46	1	75W	20	46 / 6	117	470°F / 243°C	510°F / 266°C	-35°F / -37°C
ZF 68	L0950-	68	2	80W	20	70 / 8	106	475°F / 246°C	510°F / 266°C	-20°F / -29°C
ZF 100	L0953-	100	3	80W	30	101 / 11	97	475°F / 246°C	545°F / 285°C	-10°F / -23°C
*ZF Series Fluids are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
Marine-Safe 32	L0822-	32	-	-	10	33 / 6	110	395°F / 202°C	455°F / 235°C	-45°F / -43°C
Marine-Safe 46	L0823-	46	1	75W	20	44 / 7	108	425°F / 218°C	470°F / 243°C	-35°F / -37°C
Marine-Safe 68	L0824-	68	2	80W	20	68 / 9	104	445°F / 229°C	520°F / 271°C	-20°F / -29°C
*Marine-Safe Fluids are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										

ECO-Responsible, Bio-Based Fluid Lubricants



Bio-Based Series Hydraulic Oils: Ultimately Biodegradable (Pw1), Vegetable-Based Oils.

For use in hydraulic systems where biodegradability properties are required. A zinc-free additive system delivers exceptional anti-wear, anti-rust, anti-foam and demulsibility properties. They meet ASTM D-5864 (Pw1).

UTF-Bio-Based/Green: Ultimately Biodegradable (Pw1), Vegetable-Based, Universal Tractor Fluid.

An ultimately biodegradable (Pw1), vegetable-based fluid, designed for use in agricultural, construction/industrial equipment where UTF type fluids are required. Meets the requirements of API GL-4 and most OEMs including: John Deere's Hygard, J20-C, J14A, Quantrol™ J20D, Allison C-3 and C-4, Cat TO-2, Case, Ford, Massey-Ferguson White Farm, Kubota, Steiger and others.

LUBRIPLATE PRODUCT	*PRODUCT PART NO.	ISO GRADE	AGMA NO.	SAE GEAR OIL NO.	SAE NO.	VISCOSITY cSt @40°C / 100°C	VISCOSITY INDEX	FLASH POINT	FIRE POINT	POUR POINT
BIO-BASED 32	L1050-	32	-	-	10	31 / 7	184	457°F / 236°C	500°F / 260°C	-40°F / -40°C
BIO-BASED 46	L1051-	46	1	75W	20	44 / 10	199	469°F / 243°C	514°F / 268°C	-22°F / -30°C
BIO-BASED 68	L1052-	68	2	80W	20	64 / 13	198	484°F / 251°C	525°F / 274°C	-31°F / -35°C
*BIO-Based Series Hydraulic Oil are available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										
UTF-BIO-BASED/GREEN	L1072-	46	1	75W	20	48 / 10	210	484°F / 251°C	-	-38°F / -39°C
*UTF-Bio-Based/Green is available in 5 Gallon Pails (Package Part No. Suffix -060) and 55 Gallon Drums (Package Part No. Suffix -062).										

Biodegradable Penetrating Oil Multi-Purpose Lubricating Fluid:

ECO-Friendly, Biodegradable, Vegetable-Based, Multi-Purpose Spray Lubricant.

An environmentally friendly, biodegradable, bio-based, lubricating oil for general lubrication of hinges, locks, latches, slides, chains, cables or anywhere metal contacts metal. Ideal for cars, boats, bicycles, garden equipment, guns, tools, office equipment, garage doors, farm equipment and golf courses. Provides a long lasting protective film that prevents friction, wear, rust and corrosion. Excellent moisture displacement properties. Available in 11 OZ. / 312 g. spray can, Part No. L0721-063.



ECO-Responsible Grease



VGP COMPLIANCE STATEMENT


LUBRIPLATE BIOBASED EP-2 GREASE is an Environmentally Acceptable Lubricant (EAL) according to the definitions and requirements of the US EPA 2013 Vessel General Permit, as described in VGP Section 2.2.9

BIOBASED EP-2 Grease: Ultimately Biodegradable (Pw1), Environmentally Acceptable, Bio-based Grease.

An Environmentally Acceptable Lubricant (EAL). Meets U.S. EPA Vessel General Permit (VGP) Requirements. Passes U.S. EPA Static Sheen Test (1617). Passes U.S. EPA Acute Toxicity Test (LC50). Ultimately Biodegradable (Pw1). Excellent for slow to medium speed bearings, Articulated Tug Barges (ATB) notch interface, rudder shafts, wire rope, above deck equipment, port equipment, cranes, barges, oil platforms, water treatment and hydroelectric facilities. Excellent extreme pressure/anti-wear properties. Highly resistant to fresh and salt water.

LUBRIPLATE PRODUCT	*PRODUCT PART NO.	GREASE TYPE THICKENER	NLGI GRADE	BASE OIL TYPE	BASE OIL VIS. cSt @ 40°C	RECOMMENDED TEMPERATURE RANGE MINIMUM	RECOMMENDED TEMPERATURE RANGE MAXIMUM	ASTM DROP POINT
BIOBASED EP-2	L0341-	Lithium 12 Hydroxy Stearate	2	Vegetable Oil	100	15°F / -9°C	285°F / 196°C	385°F / 196°C
*BIOBASED EP-2 Grease is available in Cartridges (Package Pt. No. Suffix -098) and 120 lb Lined 1/4 Drums (Package Pt. No. Suffix -039).								

District Managers and Specialists

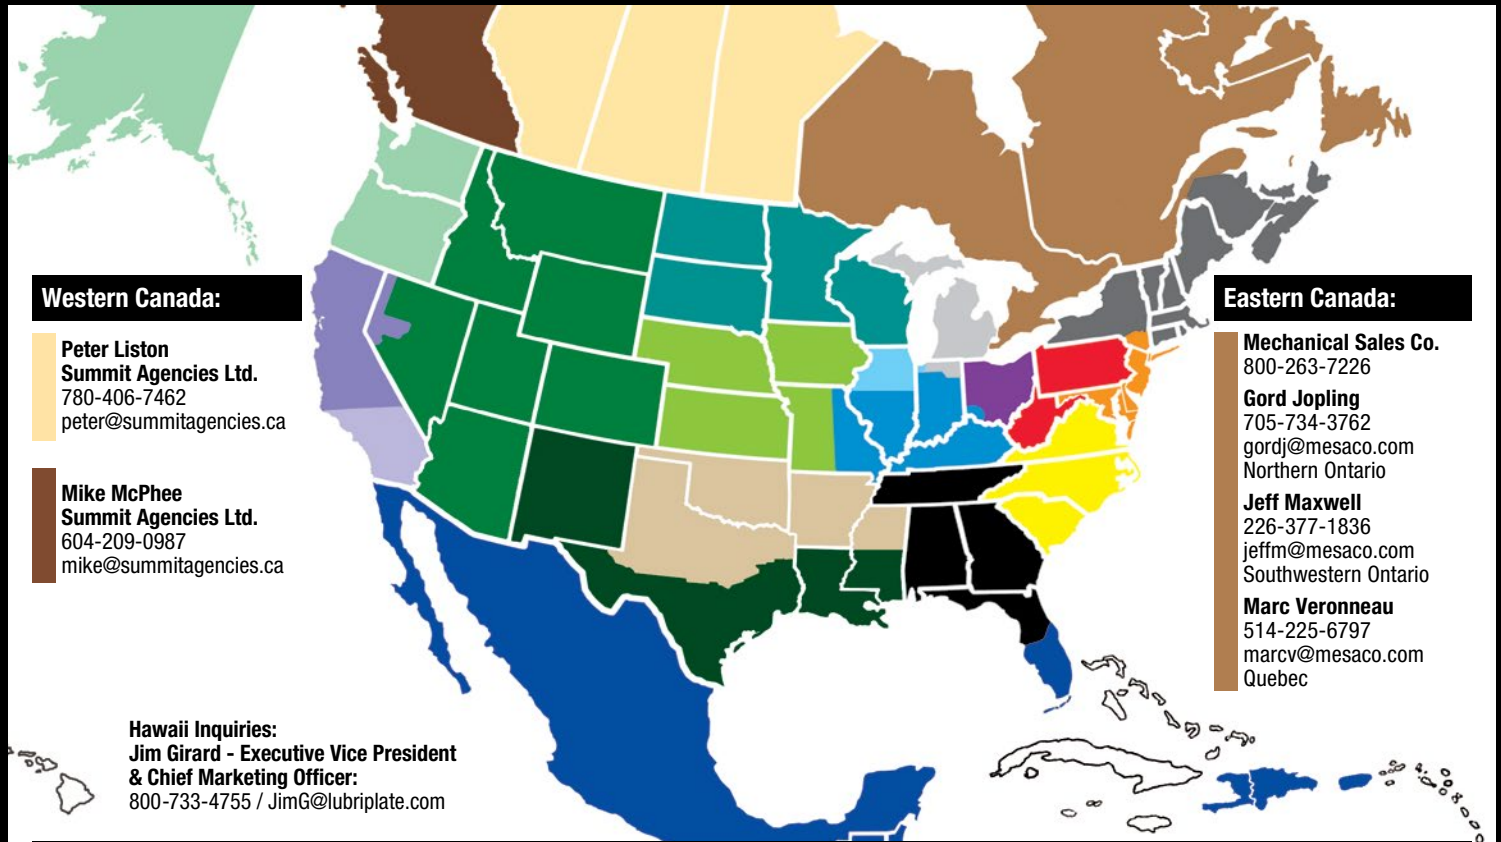

Western Canada:

Peter Liston
Summit Agencies Ltd.
780-406-7462
peter@summitagencies.ca

Mike McPhee
Summit Agencies Ltd.
604-209-0987
mike@summitagencies.ca

Eastern Canada:

Mechanical Sales Co.
800-263-7226

Gord Jopling
705-734-3762
gordj@mesaco.com
Northern Ontario

Jeff Maxwell
226-377-1836
jeffm@mesaco.com
Southwestern Ontario

Marc Veronneau
514-225-6797
marcv@mesaco.com
Quebec

Hawaii Inquiries:
**Jim Girard - Executive Vice President
& Chief Marketing Officer:**
800-733-4755 / JimG@lubriplate.com

Western Region District Managers

Douglas J. Smith
360-488-3382
dsmith@lubriplate.com

Dan O'Brien
801-550-0383
dobrien@lubriplate.com

Josh Anderson
707-398-3896
janderson@lubriplate.com

Ellie Girard
908-489-7355
egirard@lubriplate.com

Chris Qualizza
262-339-3659
cqualizza@lubriplate.com

Brian Joens
bjoens@lubriplate.com
515-320-1012

Roger Thostenson
972-998-0344
rthostenson@lubriplate.com

Mike Wrocklage
713-725-1294
mwrocklage@lubriplate.com

Central Region District Managers

Chris Franzoni
586-530-6922
cfranzoni@lubriplate.com

Scott Besedick
219-689-2365
sbesedick@lubriplate.com

Jeff Seymour
219-921-6800
js Seymour@lubriplate.com

Ed Blank Jr.
419-320-0899
ERBlank@lubriplate.com

Tom Martin
717-844-2002
tmartin@lubriplate.com

David Roberts
407-760-7933
droberts@lubriplate.com

Nick Guerrero
973-934-1929
nguerrero@lubriplate.com
Covered Areas: So. FL, PR,
Central & South America

Eastern Region District Managers

Chris Kniestedt
603-484-5262
ckniestedt@lubriplate.com

John Girard
908-675-6889
johng@lubriplate.com

Robert A. Reh Jr.
864-270-8558
rrehjr@lubriplate.com

Specialists:

**Executive Vice President
& Chief Marketing Officer:**
All International Inquiries:
Jim Girard - 800-733-4755
JimG@lubriplate.com

**Assistant Vice President / Domestic
Sales and Service Inquiries:**
Tim Cusack - 800-733-4755
TimC@lubriplate.com

**Director of Field Engineering
and Training Services:**
David Reh - 973-722-6098
dreh@lubriplate.com

Vice President / Chief Sales Officer:
Steve Morrow -
Office: 973-589-9150
Cell: 973-722-6516
SMorrow@lubriplate.com

**Vice President /
Internal Sales Operations:**
Paul McCluskey - 800-733-4755
paulm@lubriplate.com

**OEM Marketing Analyst and
Government Agency Liaison:**
Ellie Girard - 908-489-7355
EGirard@lubriplate.com

**Vice President /
Chief Technical Officer:**
Sib Hamid -
419-691-2491
SHamid@lubriplate.com

National Accounts Manager:
Don Wrocklage -
314-614-7488
dwrocklage@lubriplate.com

Perma Lubricants Specialist:
Connor Cusack -
800-733-4755
ccusack@lubriplate.com

**Vice President / General Manager
Toledo Operations:**
Rudy Agosti -
419-691-2491
ragosti@lubriplate.com

Domestic Sales Director Toledo:
Todd Baumgartner -
419-691-2491
tbaumgartner@lubriplate.com

Quality Manager:
Stan Baer -
419-691-2491
sbaer@lubriplate.com

Lubriplate Lubricants Company

129 LOCKWOOD STREET / NEWARK, NJ 07105 / TEL 800-733-4755
TOLEDO, OH OFFICE / TEL 419-691-2491 / FAX 800-347-5348

