

Elevating Performance with Lubriplate & Perma



Unlock unparalleled benefits with **Perma Automatic Lubricators** and **Lubriplate's** heavy-duty, high-performance greases.

EXPERIENCE EXCELLENCE

- **Generate Cost Savings:** Achieve efficiency that directly impacts your bottom line.
- **Increase Bearing Life:** Elevate the longevity and reliability of critical components.
- **Reduce Downtime:** Maximize operational uptime and minimize disruptions.
- **Improve Worker Safety:** Enhance workplace safety through consistent and reliable lubrication.
- **Keep Contaminants Out:** Safeguard machinery against harmful elements, ensuring optimal performance.

PERMA AUTOMATIC LUBRICATORS



ULTRA



Star Vario/Star Vario Blue Tooth



Flex

PREFILLED WITH LUBRIPLATE HIGH PERFORMANCE GREASES

Featuring:

- SYN-1602
- LTR-2 Red
- No. 3000
- Max Tac Red
- POLY HP-2



PERMA ULTRA

Ideal for high-demand applications with adjustable pressure and flexible settings. Perfect for safe access in equipment like drag conveyors, shaker screens, rotary kilns, and belt conveyors.



STAR VARIO/STAR VARIO BLUETOOTH

Fully automatic, precise lubrication. Electromechanical drive, selectable discharge period, and canister size (60-500 cc) with

LED status indicators


The Bluetooth-enabled version, perma STAR VARIO Bluetooth, can be conveniently operated via the perma CONNECT app.



*Heavy Duty Remote Mounting Bracket Kits/Mounting Solutions Available

PERMA FLEX 125CC

Available in two sizes (60 cc / 125 cc), suitable for -4 °F to 140 °F (-20 °C to 60 °C). Flexible discharge period (1-12 months) set via the top dial. Fully assembled, activated by turning the dial, and maintains continuous lubrication through an electronically controlled chemical reaction.

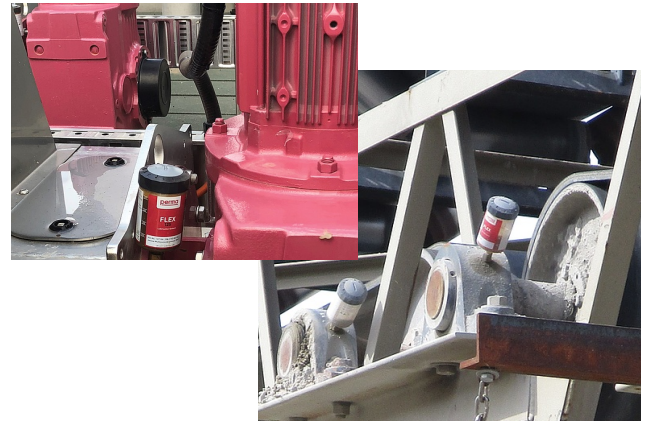

PRELOADED PERFORMANCE

- **SYN-1602:** Heavy-Duty, Tacky, **White**, Full Synthetic Lithium Complex, Extreme Pressure, NLGI 2 Grease.
- **LTR-2:** Heavy-Duty, Tacky, **Red**, Lithium Complex, Extreme Pressure, NLGI 2 Grease.
- **No. 3000:** Heavy-Duty, Tacky, **Black**, 5% MOLY, Lithium Complex, Extreme Pressure, NLGI 2 Grease.
- **Max Tac Red:** Heavy-Duty, Tacky, **Red**, Multi-Purpose, Lithium Complex, Extreme Pressure, NLGI GC/LB Certified for wheel bearings and chassis.
- **Poly HP-2:** Polyurea, **Blue**, NLGI 2 Electric Motor Bearing Grease.



LUBRIPLATE LUBRICANTS COMPANY

Newark, NJ 07105 | Toledo, OH 43605 | 800-733-4755
LubeXpert@lubriplate.com | www.lubriplate.com

Included at no additional charge:



Color-coded Lube Charts & Machinery Tags
Plant Surveys | Tech Support | Training
Lubrication Software | Follow-up Oil Analysis